


Low Pass Filter
50Ω BNC
9th Order



Part Number: CLPFL-0004-BNC

Low Pass Range
DC to 4 MHz

**New BNC
Low Pass Filters**

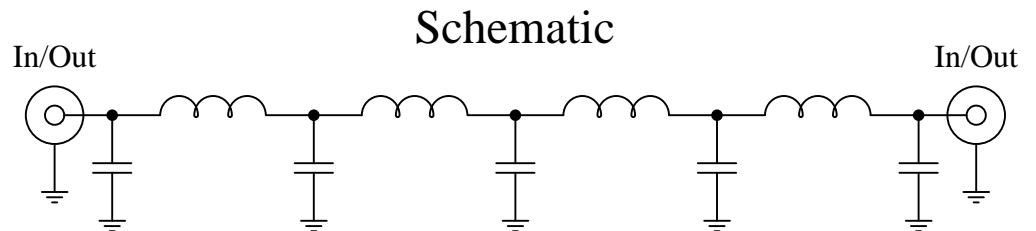

Features:


- 9th Order Chebyshev Response
- 50Ω BNC Connectors

Applications:

- Test Equipment
- Lab Use

Maximum Ratings:



- +36dBm (4 Watts)
- Operating Temperature: -40°C to 85°C
- Storage Temperature: -55°C to 100°C

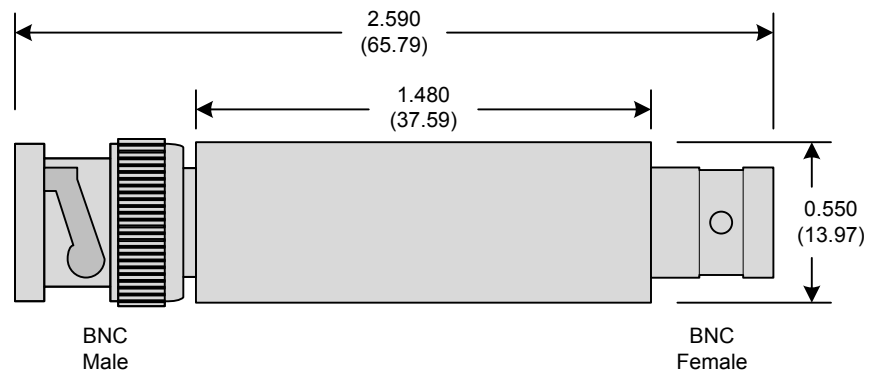

Crystek's new line of BNC Low Pass Filters are designed in a rugged BNC housing. This filter line has excellent out-of-band rejection.

Designed for Test Equipment and General Lab Use.

Rev C
Page 1 of 3

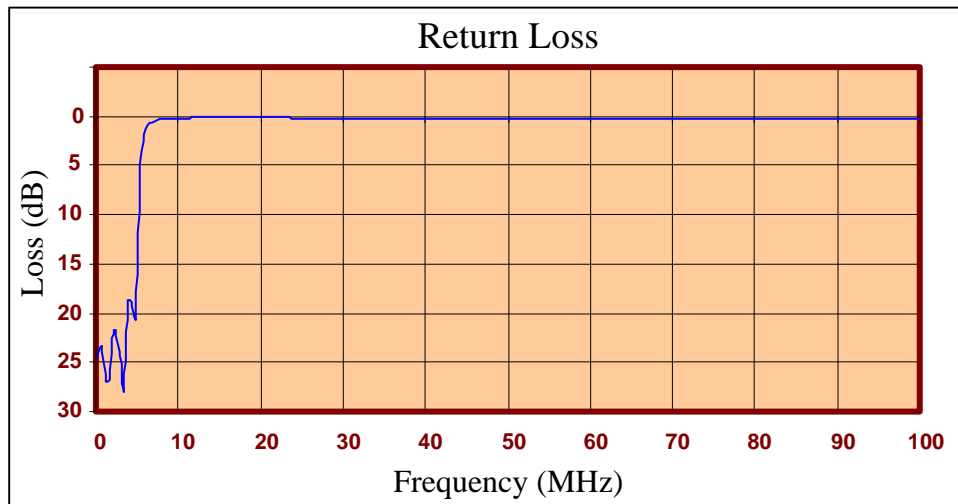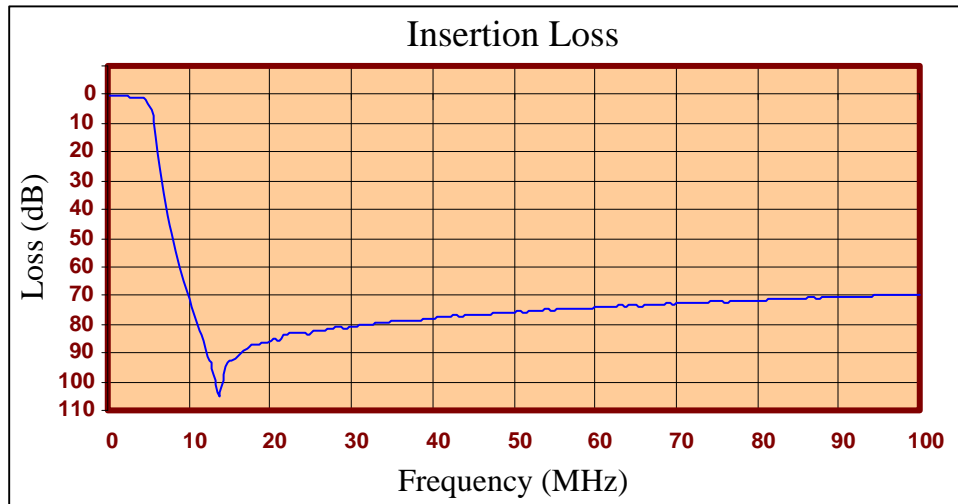



FREQ (MHz)	INSERTION LOSS (dB)	RETURN LOSS (dB)
0.300	0.43	24.62
0.799	0.52	23.32
1.297	0.57	27.00
1.796	0.63	26.82
2.294	0.72	21.67
2.793	0.81	23.90
3.291	0.94	27.72
3.790	1.16	18.59
4.288	1.44	18.81
4.787	2.01	20.53
5.285	5.32	6.59
5.784	15.20	1.78
6.282	25.45	0.87
6.781	34.22	0.56
7.279	41.80	0.41
7.778	48.47	0.33
8.276	54.42	0.27
8.775	59.91	0.24
9.273	64.78	0.21
9.772	69.26	0.19
10.270	73.77	0.18
10.769	78.06	0.17
11.267	82.00	0.16
12.264	90.96	0.15
12.763	94.18	0.15
13.261	101.18	0.15
13.760	105.12	0.15
14.258	97.27	0.15
14.757	93.62	0.15
19.243	82.53	0.15
26.222	82.53	0.17
35.195	79.11	0.19
45.165	76.80	0.21
56.132	74.66	0.23
65.105	73.44	0.25
75.075	72.10	0.26
91.027	70.45	0.28
100.000	69.53	0.28

Product Control:

Crystek Part Number:	CLPFL-0004-BNC	Release Date:	01-Jun-2015
Revision Level:	C	Responsible:	K. Piotrowicz

Rev C
Page 3 of 3

