Effective January 2016 Supersedes September 2012

# HEZ breakaway and non-breakaway in-line rejection fuse holders for UL Class CC fuses



#### **Catalog Symbol: HEZ**

#### Description:

Bussmann<sup>®</sup> series HEZ submersible, single-pole in-line rejection fuse holders are for UL Class CC fuses. They are available in non-breakaway and breakaway versions with an array of terminal options to meet application needs. Breakaway versions come with insulating boots to provide submersibility per UL IP67. Non-breakaway versions require ordering optional insulating boots for submersibility.

#### **Recommended fuses:**

Catalog symbol	Operation	Data sheet No.
LP-CC	— Time-delay	1023
FNQ-R	- Time-delay	1014
KTK-R	Fast-acting	1015

#### **Ratings:**

Volts: 600V

Amps:up to 30A limited by conductor sizeWithstand:200kA RMS Sym.

#### Agency information:

UL® Listed, Guide IZLT, File E14853

CSA® Certified, Class 6225-01, File 47235

CE, RoHS compliant

#### **Coupling nut torque:**

10-20 Lb-In (1.1-2.2 N•m)

#### Operating and storage temperature:

-40°F (-40°C) to 221°F (105°C)

#### Insulating boots:

Two insulating boots come standard with the breakaway holder configurations. Insulating boots are not included as standard with non-breakaway holders. Two insulating boots must be ordered separately, if required, for each non-breakaway holder ordered. When insulating boots are utilized, extra heat retention requires that fuses are sized at a minimum of 200% of the RMS load current.




### Use these part numbers to order insulating boots for a non-breakaway HEZ holder:

BUSSMAR


Description	Part no.					
Single conductor	2A0660					
Dual conductor	2A0661					

#### **Boot reference:**



#### Installation instructions:

Strip wire insulation equal to the depth of the crimp or screw terminal. Torque screw terminal to 35 Lb-In (3.9 N•m) or crimp terminal twice, spacing crimps a distance of one-third from each end (as shown below) using an appropriate crimp tool and die. See page 3 for recommended crimping tools.



#### **Related products:**


Catalog no.	Description	Data sheet no.
HEX	Two-pole supplemental in-line fuse holder	2126
HEB	One-pole supplemental in-line fuse holder	2127
HEY	Two-pole Class CC in-line fuse holder	2126
HET	One-pole in-line, permanently installed neutral	2125
NNB-R	Class CC neutral dummy link (not a fuse)	_

## Bussmann series HEZ breakaway and non-breakaway in-line rejection fuse holders for UL Class CC fuses


Non-breakaway catalog number system							em		To order:							
						Specify catalog symbol HEZ and the loadside terminal code. Then select a lineside terminal code that is available with the loadside terminal. Example: HEZ-AA defines a non-breakaway holder with both loadside and lineside copper crimp terminals for a single 8-16 AWG or two 12-16 AWG wires.										
	5 -0	side nal	ide nal		Agency Information Loadsic			de terminal		Lineside terminal				Reference		
	Catalog symbol	Loads termi	Lines termi	UL	CSA	Terminal ty	/ре		Wire range*	Terminal type			Wire range*	length A	Breakaway equivalent	
	HEZ	А	A	х	Х	Cu crimp	-	Ô	#8-16; (2) #12-16	Cu crimp	-		#8-16; (2) #12-16	4.4 (112)	HEZ-AW-RLC-A	


\* Solid/stranded conductors unless otherwise noted.

#### Non-breakaway terminal data

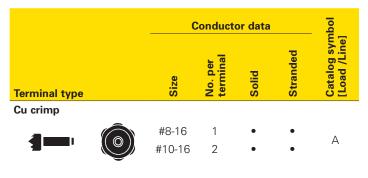


#### Non-breakaway dimensions - in (mm):



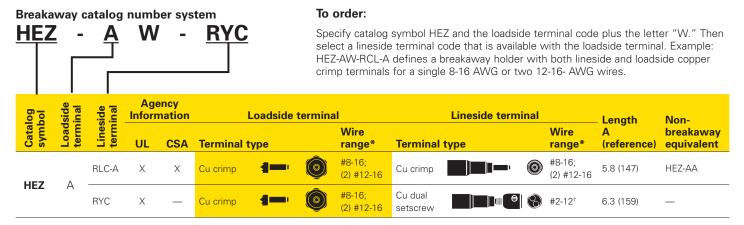


\* Solid/stranded conductors unless otherwise noted.

#### Breakaway loadside terminal data

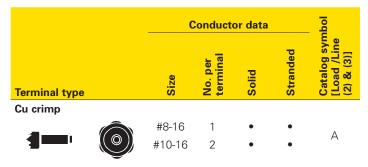


#### Breakaway lineside terminal data

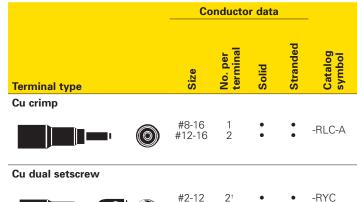

† Not dual wire rated. One wire per opening.

#### **Dimensions - in (mm):**



#### **Recommended crimping tools:**

Some of the commercially available crimping tools that can be used with the HEZ fuse holders are listed in the table below. This list is not intended to exclude the use of other crimping tools that can provide similar crimps or indents.

HEZ terminal	T and B P/N (Die)			
	WT-111M (Die C)			
А	Sta-Kon ERG4002 (Die C)			

The only controlled copy of this data sheet is the electronic read-only version located on the Eaton network drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

Eaton 1000 Eaton Boulevard Cleveland, OH 44122 Eaton.com

Bussmann Division 114 Old State Road Ellisville, MO 63021 United States Eaton.com/bussmannseries

© 2016 Eaton All Rights Reserved Printed in USA Publication No. 2130 - BU-MC16001 January 2016 Eaton and Bussmann are valuable trademarks of Eaton in the US and other countries. You are not permitted to use the Eaton trademarks without prior written consent of Eaton.

CSA is a registered trademark of the Canadian Standards Group. UL is a registered trademark of the Underwriters Laboratories, Inc. For Eaton's Bussmann series product information, call **1-855-287-7626** or visit: **Eaton.com/bussmannseries** 

Follow us on social media to get the latest product and support information.



Powering Business Worldwide