

ELECTRICAL SPECIFICATIONS:

1.0 TURNS RATIO: (P7-P6-P8) : (J3-J6) (P1-P3-P2) : (J1-J2)

2.0 INDUCTANCE: (P7-P8)

(P1-P2)

3.0 LEAKAGE INDUCTANCE: P7-P8 (WITH J6 AND J3 SHORT) P1-P2 (WITH J2 AND J1 SHORT)

4.0 INTERWINDING CAPACITANCE: (P7,P6,P8) TO (J6,J3) (P1,P3,P2) TO (J2,J1)

5.0 DC RESISTANCE: (J6-J3)=(J2-J1)

: 1CT : 1CT± 3%

: 1CT : 1CT ± 3%

: 350uH MIN. @ 0.1V, 100KHz, 8mA DC Bias : 350uH MIN. @ 0.1V, 100KHz, 8mA DC Bigs

: 0.3uH MAX. @ 1MHz : 0.3uH MAX. @ 1MHz

: 30pf TYP @ 1MHz : 30pf TYP @ 1MHZ

: 1.4 ohms Max.

Bel Stewart Connector

11118 Susquehanna Trail, South Glen Rock, Pa 17327-9199 717.234.7512

http://www.stewartconnector.com

DRAWING NO.

SI-50151-F

CONNECTION ARE OMITTED.

TOLERANCE.

2.0 ALL RESISTORS ARE ±5%

RoHS

2002/95/EC

SHEET 1 OF 4

THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON ARE CONFIDENTIAL AND PROPERTY OF BEL STEWART CONNECTOR AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT PRIOR WRITTEN CONTENT OF BEL STEWART CONNECTOR. THE SUBJECT MATTER MAY BE PATENTED OR A PATENT MAY BE PENDING.

RECEIVE

6.0 RETURN LOSS: (P7-P8)=100 OHMS AND (P1-P2)=100 OHM REF.

1MHz TO 30MHz : -18dB MIN.

: -(19-20 LOG (f/30MHz))30MHz TO 60MHz

60MHz TO 80MHz : 12dB MIN.

NOTE: 100 OHMS CONNECTED TO (J2-J1) OR (J6-J3).

7.0 DIELECTRIC WITHSTAND: (J3, J6) TO (P7, P8) : 1500 VAC

(J1, J2) TO (P1,P2) : 1500 VAC

8.0 INSERTION LOSS: RS=RL=100 ohms

1-65MHz : -1 dB MAX

9.0 RISE TIME: RS=100 OHMS AND RL = 100 OHMS

OUTPUT VOLTAGE = 1 V peak: 3.0 nS MAX PULSE WIDTH= 112nS : 3.0 nS MAX


10.0 CROSS TALK: 1-65MHz : -35 dB MIN


11.0 COMMON TO COMMON MODE ATTENUATION: 30MHz TO 100MHz : -30dB MAX

: -20dB MAX 100MHz TO 130MHz

> Bel Stewart Connector 11118 Susquehanna Trail, South Glen Rock, Pa 17327-9199 717.234.7512

http://www.stewartconnector.com

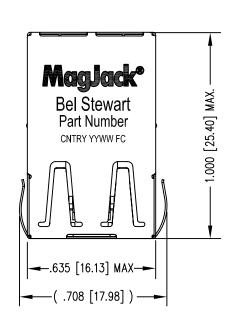


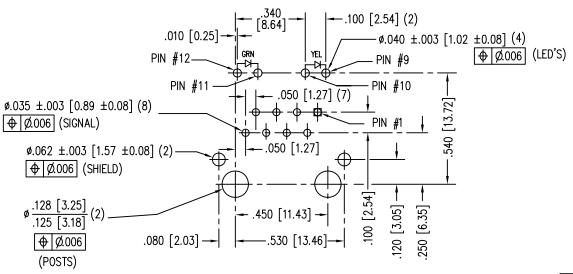


P.C.B. RECOMMENDED HOLE LAYOUT SEEN FROM COMPONENT SIDE

ALL CENTERLINE DIMENSIONS ARE BASIC.





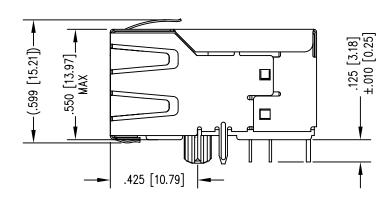

LED SPECIFICATION			
STANDARD LED	WAVELENGTH	FORWARD V (MAX)	*(TYP)
GREEN	565 nm	2.5 V	2.2 V
YELLOW	590 nm	2.5 V	2.1 V

*WITH A FORWARD CURRENT OF 20 mA (TYP)

NOTES:

1. CONNECTOR MATERIALS:

HOUSING: THERMOPLASTIC UL94 V-0 CONTACT/SHIELD: COPPER ALLOY SHIELD PLATING: NICKEL OR TIN CONTACT PLATING: SELECTIVE GOLD,

50 MICRO-INCHES MIN. IN CONTACT AREA.

- 2. PIN NOT ELECTRICALLY CONNECTED MAYBE OMITTED. SEE ELECTRICAL DRAWING FOR OMITTED PINS.
- 3. TOLERANCES COMPLY WITH F.C.C. DIMENSION REQUIREMENTS.
- 4. ALL TOLERANCES NOT OTHERWISE SPECIFIED TO BE ±.005 [0.13]
- 5. REFLOW AND WAVE SOLDER COMPATIBLE-260°C FOR 10 SECONDS MAX.

Bel Stewart Connector
11118 Susquehanna Trail, South

Glen Rock, Pa 17327-9199 717.234.7512



http://www.stewartconnector.com


THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON ARE CONFIDENTIAL AND PROPERTY OF BEL STEWART ONNECTOR AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT PRIOR WRITTEN CONTENT OF BEL STEWART CONNECTOR. THE SUBJECT MATTER MAY BE PATENTED OR A PATENT MAY BE PENDING.


SHEET 3 OF 4

DRAWING NO.

SI-50151-F

REV. 1

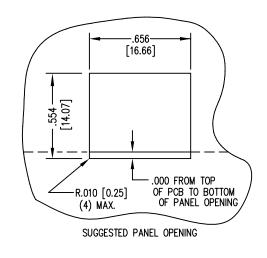



- 1. THE SUGGESTED PANEL OPENING IS INTENDED TO GIVE THE USER THE ABILITY TO HAVE REASONABLE JACK / PANEL CLEARANCES YET MAINTAIN RELIABLE GROUNDING CAPABILITY.
- 2. ALL TOLERANCES NOT OTHERWISE SPECIFIED TO BE ±.005 [0.13]

Bel Stewart Connector 11118 Susquehanna Trail, South Glen Rock, Pa 17327-9199 MagJack

http://www.stewartconnector.com

THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON ARE CONFIDENTIAL AND PROPERTY OF BEL STEWART CONNECTOR AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT PRIOR WRITTEN CONTENT OF BEL STEWART CONNECTOR. THE SUBJECT MATTER MAY BE PATENTED OR A PATENT MAY BE PENDING.

SHEET DRAWING

717.234.7512

DRAWING NO.

SI-50151-F 8EV. 09