

SCR Series, Radial, C Technology, COG Dielectric, 50 – 200 VDC (Commercial Grade)

KEMET's radial through-hole ceramic SCR Series capacitors in COG dielectric feature proprietary Ceramic Cased Capacitor (C³) Technology and are designed to meet the needs of critical, high reliability and higher temperature applications. C³ Technology features a unique lead attach configuration with direct internal connection to the Multilayer Ceramic Capacitor (MLCC) electrode system. This configuration promotes superior "pull away" performance and uniform coefficient of linear expansion characteristics at elevated temperatures when compared to conventional through-hole technologies. Design details are outlined in U.S. Patent Number 4931899.

COG dielectric features a 125°C maximum operating temperature and is considered "stable." The Electronics Industries Alliance (EIA) characterizes COG dielectric as a Class I material. Components of this classification are temperature compensating and are suited for resonant circuit applications or those where Q and stability of capacitance characteristics are required. COG exhibits no change in capacitance with respect to time and voltage and boasts a negligible change in capacitance with reference to ambient temperature. Capacitance change is limited to ±30 ppm/°C from -55°C to +125°C.

Benefits

- Radial through-hole form factor
- Non-encapsulated
- Proprietary and robust C³ Technology design
- 0.200" and 0.400" lead spacing
- -55°C to +125°C operating temperature range
- DC voltage ratings of 50 V, 100 V and 200 V
- Capacitance offerings ranging from 10 pF up to 0.18 µF
- Available capacitance tolerances of ±5%, ±10% and ±20%

Ordering Information


Specification/ Series	Dielectric	Lead Configuration	09 Style /Size	D Rated Voltage (VDC)	Capacitance Code (pF)	Capacitance Tolerance ¹	Lead Finish ²	Screening Option	Packaging/ Grade (C-Spec)
S=Standard	C = COG	R =Radial	05 06 07 08 09	B = 50 D = 100 F = 200	Two significant digits and number of zeros Use 9 for 1.0 – 9.9 pF Use 8 for 0.5 – .99 pF ex. 2.2 pF = 229 ex. 0.5 pF = 508	J = ±5% K = ±10% M = ±20%	W = SnPb (60/40) G = Au	S = Standard A = Group A (MIL-PRF-20)	Blank = Tray

¹ Additional capacitance tolerance offerings may be available. Contact KEMET for details.

² Lead materials:

Standard: 60% tin (Sn)/40% lead (Pb)

Dimensions – Inches (Millimeters)

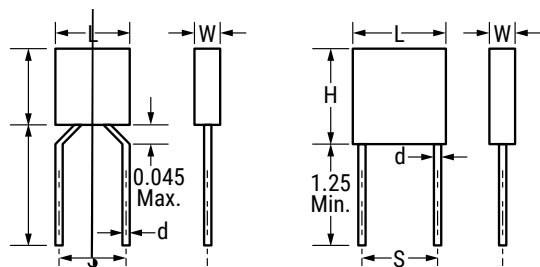

Environmental Compliance

Devices with standard lead finish option of 60% tin (Sn)/40% lead (Pb) do not meet RoHS criteria.
Devices with gold (AU) lead finish option are RoHS Compliant.

Electrical Parameters/Characteristics

Item	Parameters/Characteristics
Operating Temperature Range	-55°C to +125°C
Capacitance Change with Reference to +25°C and 0 VDC Applied (TCC)	±30 ppm/°C
Aging Rate (Maximum % Cap Loss/Decade Hour)	0%
Dielectric Withstanding Voltage	250% of rated voltage (5±1 second and charge/discharge not exceeding 50 mA)
Dissipation Factor (DF) Maximum Limit at 25°C	0.1%
Insulation Resistance (IR) Limit at 25°C	1,000 megohm microfarads or 100 GΩ (Rated voltage applied for 120±5 seconds at 25°C)

To obtain IR limit, divide MΩ-μF value by the capacitance and compare to GΩ limit. Select the lower of the two limits.

Capacitance and dissipation factor (DF) measured under the following conditions:

1 MHz ±100 kHz and 1.0 V_{rms} ±0.2 V if capacitance ≤ 1,000 pF

1 kHz ±50 Hz and 1.0 V_{rms} ±0.2 V if capacitance > 1,000 pF

Note: When measuring capacitance it is important to ensure the set voltage level is held constant. The HP4284 and Agilent E4980 have a feature known as Automatic Level Control (ALC). The κ

Table 1A – SCR05 Style/Size (0.200" Lead Spacing), Capacitance Range Waterfall

SCR05 Style/Size (0.200" Lead Spacing)				
Rated Voltage (VDC)		50	100	200
Voltage Code		D		
Capacitance	Capacitance Tolerance	Capacitance Code (Available Capacitance)		
10pF	J = ±5% K = ±10% M = ±20%	100	100	100
12pF		120	120	120
15pF		150	150	150
18pF		180	180	180
22pF		220	220	220
27pF		270	270	270
33pF		330	330	330
39pF		390	390	390
47pF		470	470	470
56pF		560	560	560
68pF		680	680	680
82pF		820	820	820
100pF		101	101	101
120pF		121	121	121
150pF		151	151	151
180pF		181	181	181
220pF		221	221	221
270pF		271	271	271
330pF		331	331	331
390pF		391	391	391
470pF		471	471	471
560pF		561	561	561
680pF		681	681	681
820pF		821	821	821
1000pF		102	102	102
1200pF		122	122	122
1500pF		152	152	152
1800pF		182	182	182
2200pF		222	222	222
2700pF		272	272	272
3300pF		332	332	332
2700pF		272	272	272
3300pF		332	332	332
3900pF	392	392	392	
4700pF	472	472	472	
5600pF	562	562	562	
6800pF	682	682	682	
8200pF	822	822	822	
0.01μF	103	103		
Rated Voltage (VDC)		50	100	200
Voltage Code		D		

Table 1B – SCR06 Style/Size (0.200" Lead Spacing), Capacitance Range Waterfall

SCR06 Style/Size (0.200" Lead Spacing)				
Rated Voltage (VDC)		50	100	200
Voltage Code		D		
Capacitance	Capacitance Tolerance	Capacitance Code (Available Capacitance)		
330pF	J = ±5% K = ±10% M = ±20%	331	331	331
390pF		391	391	391
470pF		471	471	471
560pF		561	561	561
680pF		681	681	681
820pF		821	821	821
1000pF		102	102	102
1200pF		122	122	122
1500pF		152	152	152
1800pF		182	182	182
2200pF		222	222	222
2700pF		272	272	272
3300pF		332	332	332
2700pF		272	272	272
3300pF		332	332	332
3900pF		392	392	392
4700pF		472	472	472
5600pF		562	562	562
6800pF		682	682	682
8200pF		822	822	822
0.01µF		103	103	103
0.012µF		123	123	123
0.015µF		153	153	
0.018µF		183	183	
0.022µF		223	223	
0.027µF		273	273	
0.033µF		333	333	
Rated Voltage (VDC)			50	100
Voltage Code		D		

Table 1D – SCR08 Style/Size (0.400" Lead Spacing), Capacitance Range Waterfall

SCR08 Style/Size (0.400" Lead Spacing)				
Rated Voltage (VDC)		50	100	200
Voltage Code		D		
Capacitance	Capacitance Tolerance	Capacitance Code (Available Capacitance)		
680pF	J = ±5% K = ±10% M = ±20%	681	681	681
820pF		821	821	821
1000pF		102	102	102
1200pF		122	122	122
1500pF		152	152	152
1800pF		182	182	182
2200pF		222	222	222
2700pF		272	272	272
3300pF		332	332	332
2700pF		272	272	272
3300pF		332	332	332
3900pF		392	392	392
4700pF		472	472	472
5600pF		562	562	562
6800pF		682	682	682
8200pF		822	822	822
0.01µF		103	103	103
0.012µF		123	123	123
0.015µF		153	153	153
0.018µF		183	183	183
0.022µF		223	223	223
0.027µF		273	273	273
0.033µF		333	333	333
0.039µF		393	393	393
0.047µF		473	473	473
0.056µF		563	563	563
0.068µF		683	683	683
0.082µF		823	823	823
0.1µF		104	104	104
Rated Voltage (VDC)		50	100	200
Voltage Code		D		

Table 1E - SCR09 Style/Size (0.400" Lead Spacing), Capacitance Range Waterfall

SCR09 Style/Size (0.400" Lead Spacing)				
Rated Voltage (VDC)		50	100	200
Voltage Code			D	
Capacitance	Capacitance Tolerance	Capacitance Code (Available Capacitance)		
680pF	J = ±5% K = ±10% M = ±20%	681	681	681
820pF		821	821	821
1000pF		102	102	102
1200pF		122	122	122
1500pF		152	152	152
1800pF		182	182	182
2200pF		222	222	222
2700pF		272	272	272
3300pF		332	332	332
2700pF		272	272	272
3300pF		332	332	332
3900pF		392	392	392
4700pF		472	472	472
5600pF		562	562	562
6800pF		682	682	682
8200pF		822	822	822
0.01µF		103	103	103
0.012µF		123	123	123
0.015µF		153	153	153
0.018µF		183	183	183
0.022µF		223	223	223
0.027µF		273	273	273
0.033µF		333	333	333
0.039µF		393	393	393
0.047µF		473	473	473
0.056µF		563	563	563
0.068µF		683	683	683
0.082µF		823	823	
0.1µF				


Soldering Process

Recommended Soldering Technique:

- Solder Wave
- Hand Soldering (Manual)

Recommended Soldering Profile:

- Optimum Wave Solder Profile

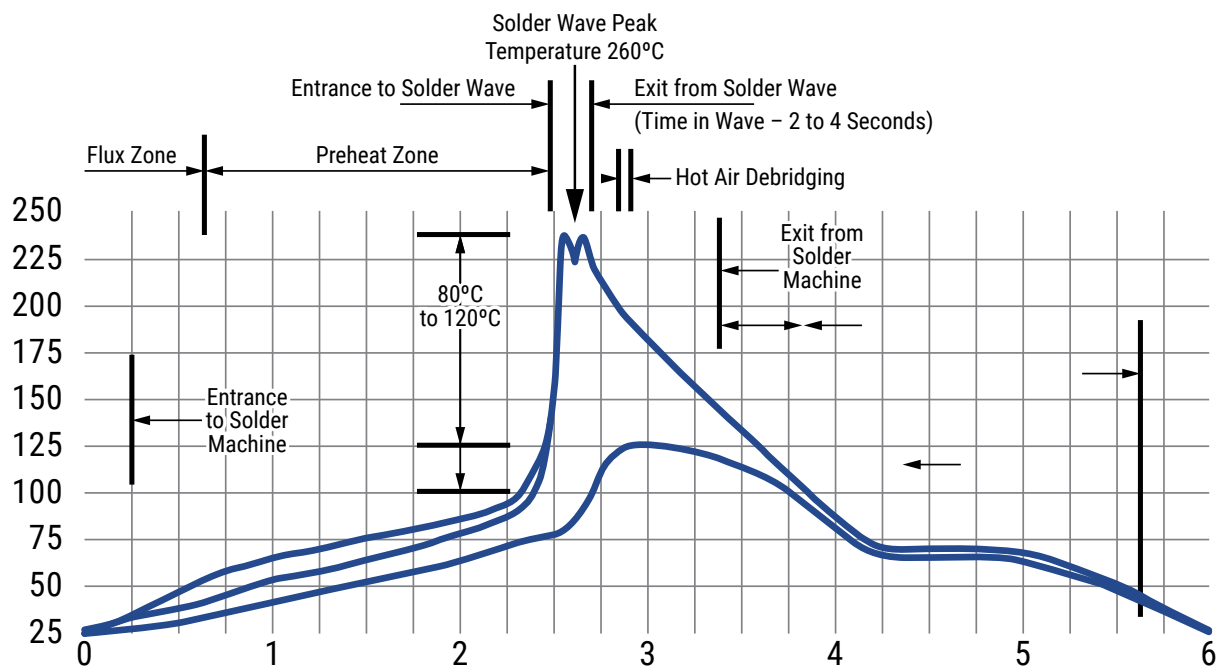

Packaging Details

Lead Spacing	Component Pitch (P1)
0.100 (2.54)	5.08
0.200 (5.08)	3.81
0.400 (10.16)	7.62
0.170 (4.32)	
0.220 (5.59)	
0.275 (6.98)	
0.300 (7.62)	
0.375 (9.52)	
0.475 (12.06)	
0.575 (14.60)	
0.675 (17.14)	

Packaging Quantities

Series	Style/Size	Tray Quantity Minimum	Tray Quantity Maximum
SCR	05	1	56
	06		28
	07		20
	08		
	09		

¹ Minimum order value applies. Contact KEMET for details.

Marking



KEMET Electronic Corporation Sales Offices

For a complete list of our global sales offices, please visit www.kemet.com/sales.

Disclaimer

All product specifications, statements, information and data (collectively, the "Information") in this datasheet are subject to change. The customer is responsible for checking and verifying the extent to which the Information contained in this publication is applicable to an order at the time the order is placed.

All Information given herein is believed to be accurate and reliable, but it is presented without guarantee, warranty, or responsibility of any kind, expressed or implied.

Statements of suitability for certain applications are based on KEMET Electronics Corporation's ("KEMET") knowledge of typical operating conditions for such applications, but are not intended to constitute – and KEMET specifically disclaims – any warranty concerning suitability for a specific customer application or use. The Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by KEMET with reference to the use of KEMET's products is given gratis, and KEMET assumes no obligation or liability for the advice given or results obtained.

Although KEMET designs and manufactures its products to the most stringent quality and safety standards, given the current state of the art, isolated component failures may still occur. Accordingly, customer applications which require a high degree of reliability or safety should employ suitable designs or other safeguards (such as installation of protective circuitry or redundancies) in order to ensure that the failure of an electrical component does not result in a risk of personal injury or property damage.

Although all product-related warnings, cautions and notes must be observed, the customer should not assume that all safety measures are indicated or that other measures may not be required.